




AFSLUITERS
VALVES

RVS AFSLUITERS STAINLESS STEEL VALVES

V101 | V101

- 1-delige kogelafsluiter, gereduceerde doorlaat / 1 piece ball valve, reduced bore
- Bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H
8	1/4"	5,0	40,0	70	32
10	3/8"	6,8	44,5	74	38
15	1/2"	9,2	57,0	90	43,5
20	3/4"	12,5	59,5	90	46
25	1"	16,0	72,0	122	51
32	1 1/4"	20,0	78,8	122	54
40	1 1/2"	24,5	84,5	155	58
50	2"	32,0	101,8	155	62

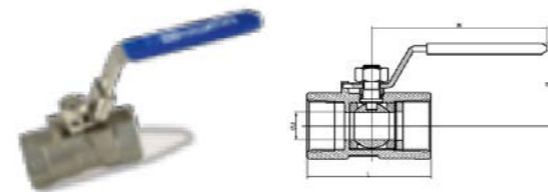

V103 | V103

- 1-delige kogelafsluiter, gereduceerde doorlaat / 1 piece ball valve, reduced bore
- bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 - DN 50 (2"): PN 40
- PTFE zittingen / seats
- Ook verkrijgbaar in NPT draad / also available in NPT threaded
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H
8	1/4"	5,0	48,0	77	30
10	3/8"	8,0	51,6	92	35
15	1/2"	10,5	60,0	95	37
20	3/4"	12,5	67,4	100	42
25	1"	16,0	72,5	103	46
32	1 1/4"	22,0	89,0	125	60
40	1 1/2"	25,0	96,0	150	62
50	2"	32,0	108,0	150	70

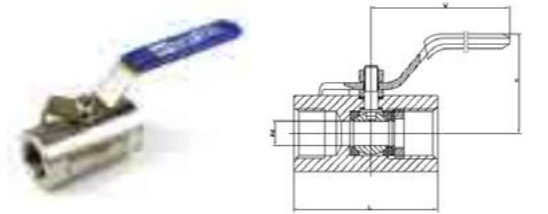

V201 | V201

- 2-delige kogelafsluiter, volle doorlaat / 2 piece ball valve, full bore
- Bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- Nominale druk / Nominal pressure DN 65 (2 1/2") - DN 100 (4"): PN 40
- PTFE zittingen / seats
- Ook verkrijgbaar in NPT draad / also available in NPT threaded
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H
8	1/4"	11,6	54,5	100	54,0
10	3/8"	12,5	54,5	100	54,0
15	1/2"	15	63,0	130	61,0
20	3/4"	20	74,6	130	67,5
25	1"	25	88,0	165	75,0
32	1 1/4"	32	102,0	165	79,0
40	1 1/2"	38	110,0	190	84,5
50	2"	50	123,2	190	96,0
65	2 1/2"	65	163,5	250	126,0
80	3"	80	189,0	250	135,5
100	4"	100	228,0	367	157,0

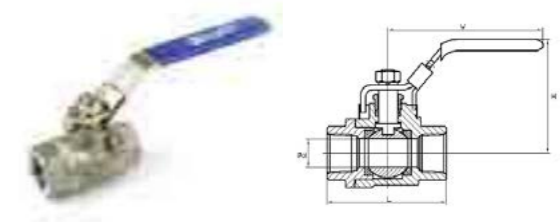

V201H | V201H

- 2-delige kogelafsluiter, volle doorlaat / 2 piece ball valve, full bore
- Bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 25 (1"): PN 140
- Nominale druk / Nominal pressure DN 32 (1 1/4") - DN 50 (2"): PN 100
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H
8	1/4"	10,86	62,5	100	58
10	3/8"	12,5	62,5	100	60
15	1/2"	15,0	62,5	130	60
20	3/4"	20,0	77,5	130	60
25	1"	25,0	90,0	165	77
32	1 1/4"	32,0	100,0	165	79
40	1 1/2"	38,0	118,0	190	92
50	2"	50,0	137,5	190	105

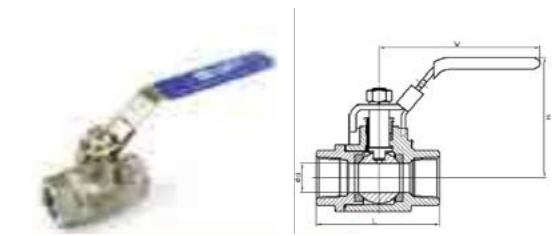


RVS AFSLUITERS STAINLESS STEEL VALVES

V202 | V202

- 2-delige kogelafsluiter, volle doorlaat / 2 piece ball valve, full bore bi/bi draad / F/F thr. ISO 228-1G, met / with ISO mounting pad
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H	ISO 5211
8	1/4"	10,0	55	105	67,0	F03 - F04
10	3/8"	12,5	60	105	67,0	F03 - F04
15	1/2"	15,0	75	120	70,0	F03 - F04
20	3/4"	20,0	80	120	75,0	F03 - F04
25	1"	25,0	90	165	78,5	F04 - F05
32	1 1/4"	32,0	110	165	84,0	F04 - F05
40	1 1/2"	38,0	120	190	116,0	F05 - F07
50	2"	48,0	140	190	125,0	F05 - F07

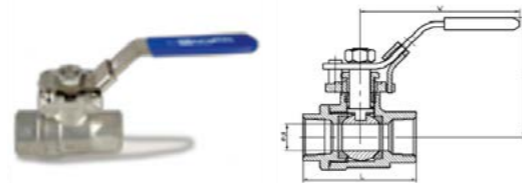

V203L | V203L

- 3-delige kogelafsluiter, gereduceerde doorlaat / 3 way ball valve, reduced bore bi/bi/bi draad / F/F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- PTFE zittingen / seats
- L-Boring / L-Bore
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H
8	1/4"	9,4	59	100	45
10	3/8"	9,4	59	100	45
15	1/2"	12,7	59	130	58
20	3/4"	17,3	76	130	60
25	1"	20,0	82	165	77
32	1 1/4"	25,0	102	165	79
40	1 1/2"	32,0	112	190	92
50	2"	38,0	138	190	105

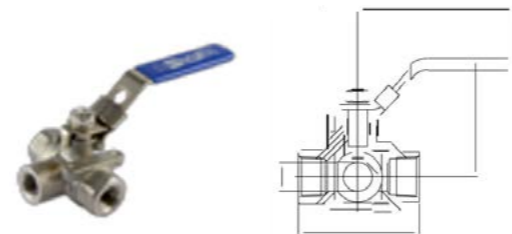

V203T | V203T

- 3-delige kogelafsluiter, gereduceerde doorlaat / 3 way ball valve, reduced bore bi/bi/bi draad / F/F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/2") - DN 50 (2"): PN 63
- PTFE zittingen / seats
- T-Boring / T-Bore
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H
8	1/4"	8	65,0	100	49
10	3/8"	8	65,0	100	49
15	1/2"	10	71,4	110	58
20	3/4"	15	82,8	120	65
25	1"	18	89,6	150	70
32	1 1/4"	24	122,0	150	78
40	1 1/2"	32	138,2	180	86
50	2"	38	151,6	180	96

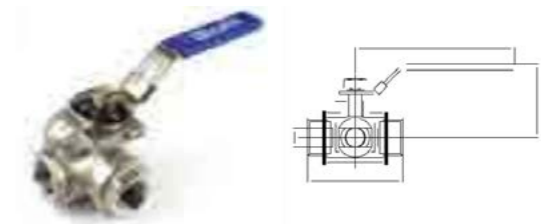

V211T | V211T

- 2-delige kogelafsluiter, volle doorlaat / 2 piece ball valve, full bore bu/bi draad / M/F thr. ISO 7-1R / ISO 228 1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H
8	1/4"	7	71	100	54,0
10	3/8"	10	76	100	54,0
15	1/2"	15	84	130	61,0
20	3/4"	20	94	130	67,5
25	1"	25	103	165	75,0
32	1 1/4"	32	121	165	79,0
40	1 1/2"	38	135	190	84,5
50	2"	50	146	190	96,0

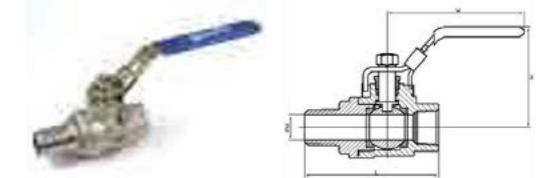


RVS AFSLUITERS STAINLESS STEEL VALVES

V301T | V301T

- 3-delige kogelafsluiter, volle doorlaat / 3 piece ball valve, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- Nominale druk / Nominal pressure DN 65 (2 1/2") - DN 100 (4"): PN 40
- PTFE zittingen / seats
- Ook verkrijgbaar in NPT draad / also available in NPT threaded
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H
8	1/4"	11,6	67,0	100	54,0
10	3/8"	12,5	67,0	100	54,0
15	1/2"	15	73,0	130	58,5
20	3/4"	20	82,5	130	65,5
25	1"	25	88,0	165	74,0
32	1 1/4"	32	111,0	165	90,0
40	1 1/2"	38	120,0	190	96,0
50	2"	50	143,8	190	104,7
65	2 1/2"	65	172,6	250	122,0
80	3"	80	203,0	250	128,0
100	4"	100	241,0	367	156,0

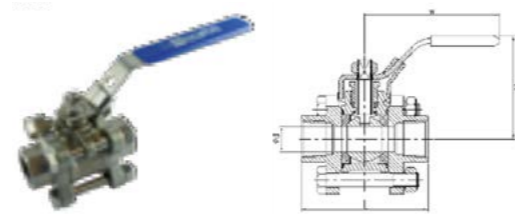

V301BW | V301BW

- 3-delige kogelafsluiter, volle doorlaat / 3 piece ball valve, full bore
- Laseinden volgens / Butt welded ends according to ANSI B16.25
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- Nominale druk / Nominal pressure DN 65 (2 1/2") - DN 100 (4"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H
8	1/4"	11,6	67,0	100	54,0
10	3/8"	12,5	68,0	100	54,0
15	1/2"	15,0	73,0	130	58,5
20	3/4"	20,0	76,2	130	65,5
25	1"	25,0	94,4	165	74,0
32	1 1/4"	32,0	109,5	165	90,0
40	1 1/2"	38,0	123,5	190	96,0
50	2"	50,0	145,0	190	104,7
65	2 1/2"	65,0	194,0	250	122,0
80	3"	80,0	217,0	250	128,0
100	4"	100,0	268,0	367	156,0

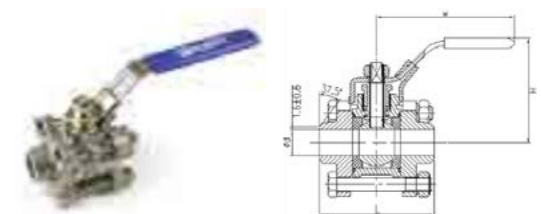


RVS AFSLUITERS

STAINLESS STEEL VALVES

V306T | V306T

- 3-delige kogelafsluiter, volle doorlaat / 3 piece ball valve, full bore bi/bi draad / F/F thr. ISO 228-1G, met / with ISO mounting pad
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- Nominale druk / Nominal pressure DN 65 (2 1/2") - DN 100 (4"): PN 40
- PTFE zittingen / seats
- Ook verkrijgbaar in NPT draad / also available in NPT threaded
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	W	H	ISO 5211
8	1/4"	10,86	67,0	100	60,0	F03 - F04
10	3/8"	12,5	67,0	100	60,0	F03 - F04
15	1/2"	15,0	72,0	130	60,0	F03 - F04
20	3/4"	20,0	82,0	130	65,0	F03 - F04
25	1"	25,0	88,0	165	80,5	F04 - F05
32	1 1/4"	32,0	112,0	165	86,5	F04 - F05
40	1 1/2"	40,0	119,0	190	98,6	F05 - F07
50	2"	50,0	140,6	190	111,9	F05 - F07
65	2 1/2"	65,0	173,0	250	138,0	F07 - F10
80	3"	80,0	204,5	250	147,5	F07 - F10
100	4"	100,0	266,0	367	168,5	F10

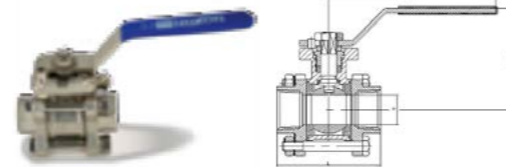

V301BW | V301BW

- 3-delige kogelafsluiter, volle doorlaat / 3 piece ball valve, full bore
- Laseinden volgens / Butt welded ends according to ANSI B16.25, met/with ISO mounting pad
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 63
- Nominale druk / Nominal pressure DN 65 (2 1/2") - DN 100 (4"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H	ISO 5211
8	1/4"	10,86	67,0	100	60,0	F03 - F04
10	3/8"	12,5	67,0	100	60,0	F03 - F04
15	1/2"	15,0	73,5	130	60,0	F03 - F04
20	3/4"	20,0	75,8	130	65,0	F03 - F04
25	1"	25,0	94,4	165	80,5	F04 - F05
32	1 1/4"	32,0	109,5	165	86,5	F04 - F05
40	1 1/2"	40,0	123,5	190	98,6	F05 - F07
50	2"	50,0	146,6	190	111,9	F05 - F07
65	2 1/2"	65,0	194,0	250	138,0	F07 - F10
80	3"	80,0	218,5	250	147,5	F07 - F10
100	4"	100,0	268,0	367	168,5	F10

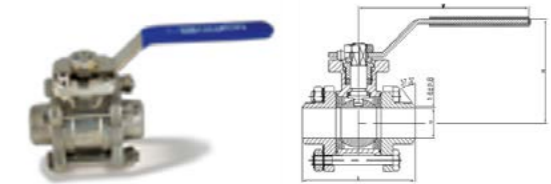

RVS AFSLUITERS STAINLESS STEEL VALVES

V403M | V403M

- 2-delige geflensde kogelafsluiter, volle doorlaat / 2 piece flanged ball valve, full bore
- Split body, flenzen volgens / Split body, flanges according to ASME B16.5
- Nominale druk / Nominal pressure DN 15 (½") - DN 150 (6"): PN 150 Lbs.
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	E
15	½"	15	108	130,0
20	¾"	20	117	130,0
25	1"	25	127	160,0
32	1 ¼"	32	140	160,0
40	1 ½"	40	165	200,0
50	2"	50	178	200,0
65	2 ½"	65	190	329,0
80	3"	76	203	329,0
100	4"	100	229	329,0
125	5"	125	254	450,0
150	6"	150	394	752,5



V404 | V404

- 3-delige geflensde kogelafsluiter, volle doorlaat / 3 piece flanged ball valve, full bore
- Flens volgens EN, met ISO mounting pad / Flange according to EN, with ISO mounting pad
- Nominale druk / Nominal pressure DN 15 (1/2") - DN 100 (4"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H	ISO 5211
15	½"	15	123,0	140	60,0	F03 - F04
20	¾"	20	146,0	140	65,0	F03 - F04
25	1"	25	160,0	180	80,5	F04 - F05
32	1 ¼"	32	184,0	180	86,5	F04 - F05
40	1 ½"	38	194,0	200	98,6	F05 - F07
50	2"	50	232,6	230	111,9	F05 - F07
40	1 ½"	40,0	119,0	190	98,6	F05 - F07
50	2"	50,0	140,6	190	111,9	F05 - F07



V405M | V405M

- 2-delige geflensde kogelafsluiter, volle doorlaat / 2 piece flanged ball valve, full bore
- Split body, flenzen volgens / Split body, flanges according to EN 1092-1
- Nominale druk / Nominal pressure DN 15 (½") - DN 50 (2"): PN 40
- Nominale druk / Nominal pressure DN 65 (½") - DN 150 (6"): PN 16
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	E
15	½"	15	115	130,0
20	¾"	20	120	130,0
25	1"	25	125	160,0
32	1 ¼"	32	130	160,0
40	1 ½"	40	140	200,0
50	2"	50	150	200,0
65	2 ½"	65	170	329,0
80	3"	80	180	329,0
100	4"	100	190	329,0
125	5"	125	325	450,0
150	6"	150	350	752,5



V405M | V405M

- Klepafsluiter, volle doorlaat / Globe valve, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (¾") - DN 50 (2"): PN 16
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	H
8	¾"	15	69	79
10	3/8"	15	69	79
15	½"	15	69	79
20	¾"	20	83	92
25	1"	25	90	116
32	1 ¼"	32	103	122
40	1 ½"	38	118	140
50	2"	50	139	158

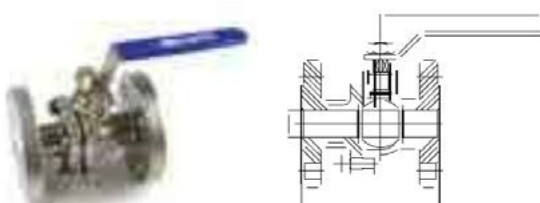


RVS AFSLUITERS STAINLESS STEEL VALVES

V601 | V601

- Schuifafsluiter , volle doorlaat / Gate valve, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (¼") - DN 50 (2"): PN 16.
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	H
8	¼"	6	62	100
10	3/8"	10	62	100
15	½"	15	62	100
20	¾"	20	62	100
25	1"	25	75	123
32	1 ¼"	32	75	135
40	1 ½"	40	95	150
50	2"	50	95	170

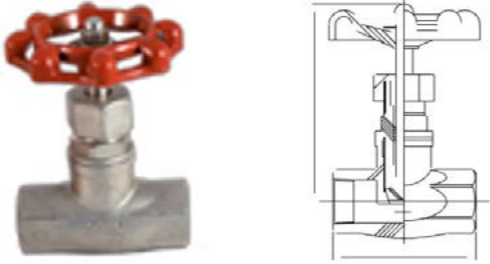

V603 | V603

- Schuifafsluiter , volle doorlaat / Gate valve, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (¼") - DN 50 (2"): PN 16.
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	H
8	¼"	11	65,0	42
10	3/8"	13	65,0	42
15	½"	15	65,0	42
20	¾"	20	81,5	52
25	1"	25	91,0	60
32	1 ¼"	32	104,0	63
40	1 ½"	38	120,0	77
50	2"	50	140,0	72

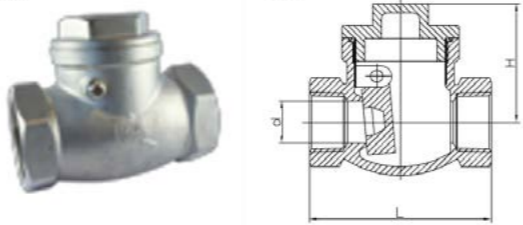

V605 | V605

- YS-Strainer, volle doorlaat / YS-Strainer, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (¼") - DN 50 (2"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	H
8	¼"	10	64	47
10	3/8"	12	64	47
15	½"	15	65	47
20	¾"	20	78	57
25	1"	25	90	67
32	1 ¼"	32	106	72
40	1 ½"	40	119	80
50	2"	50	140	93

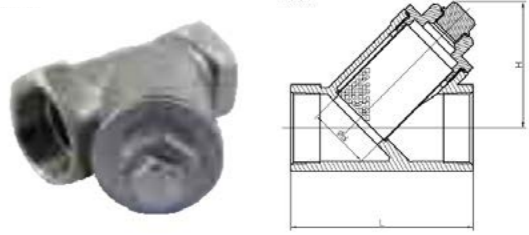

V606 | V606

- Y-type klepafsluiter, volle doorlaat / Y-Globe valve, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (¼") - DN 50 (2"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	H
8	¼"	10	64	107
10	3/8"	12	64	107
15	½"	15	65	107
20	¾"	20	78	122
25	1"	25	90	142
32	1 ¼"	32	106	155
40	1 ½"	40	119	175
50	2"	50	140	195

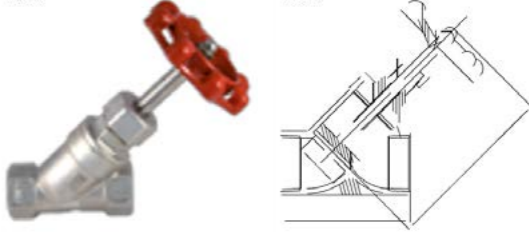


RVS AFSLUITERS STAINLESS STEEL VALVES

V607 | V607

- rugslagklep, veerbelast / Piston check valve, full bore bi/bi draad / F/F thr. ISO 228-1G
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 50 (2"): PN 40
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	H
8	1/4"	10	64	51
10	3/8"	12	64	51
15	1/2"	15	65	51
20	3/4"	20	78	60
25	1"	25	90	72
32	1 1/4"	32	106	77
40	1 1/2"	40	119	87
50	2"	50	140	103

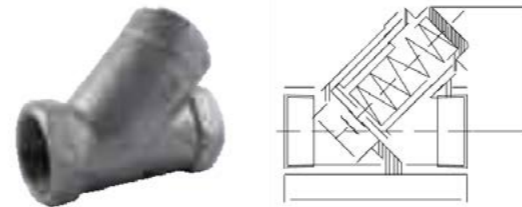

V- | V-

- Naald afsluiter / Needle Valve
- Nominale druk / Nominal pressure DN 8 (1/4") - DN 15 (1/2"): PN 408
- A' is + 5mm voor Bi-Bu Uitvoering / for M-F Valves
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C


DN	INCH	d	L	H
8	1/4"	45	25	92
10	3/8"	50	25	92
15	1/2"	60	28	95
20	3/4"	65	38	128
25	1"	70	45	135

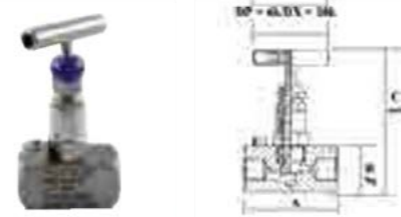

GTF-E | GTF-E

- Schuifafsluiter, volle doorlaat / Gate valve, full bore
- Flenzen volgens / Flanges according to EN1092-1
- Nominale druk / Nominal pressure DN 15 (1/2") - DN 50 (2"): PN 40
- Nominale druk / Nominal pressure DN 65 (2 1/2") - DN 150 (6"): PN 16
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H
15	1/2"	10,5	130	100	178
20	3/4"	13,5	150	100	182
25	1"	18	160	125	220
32	1 1/4"	22	180	160	221
40	1 1/2"	29	200	160	248
50	2"	50	250	240	358
65	2 1/2"	63	270	240	375
80	3"	76	280	280	433
100	4"	100	300	320	502
125	5"	125	325	320	580
150	6"	150	350	360	676

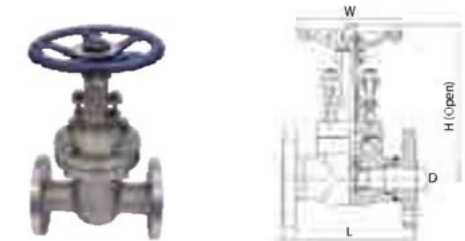


GTF-A | GTF-A

- Schuifafsluiter, volle doorlaat / Gate valve, full bore
- Flenzen volgens / Flanges according to ASME B16.5
- Nominale druk / Nominal pressure DN 15 (1/2") - DN 150 (6"): PN 150 lbs.
- PTFE zittingen / seats
- Temperatuur / Temperature -20 - 180 °C

DN	INCH	d	L	W	H
15	1/2"	10,5	108	100	178
20	3/4"	13,5	117	100	182
25	1"	18	127	125	220
32	1 1/4"	22	140	160	221
40	1 1/2"	29	165	160	248
50	2"	50	178	200	323
65	2 1/2"	63	190	250	347
80	3"	76	203	250	383
100	4"	100	229	300	457
125	5"	125	254	300	520
150	6"	150	267	350	635



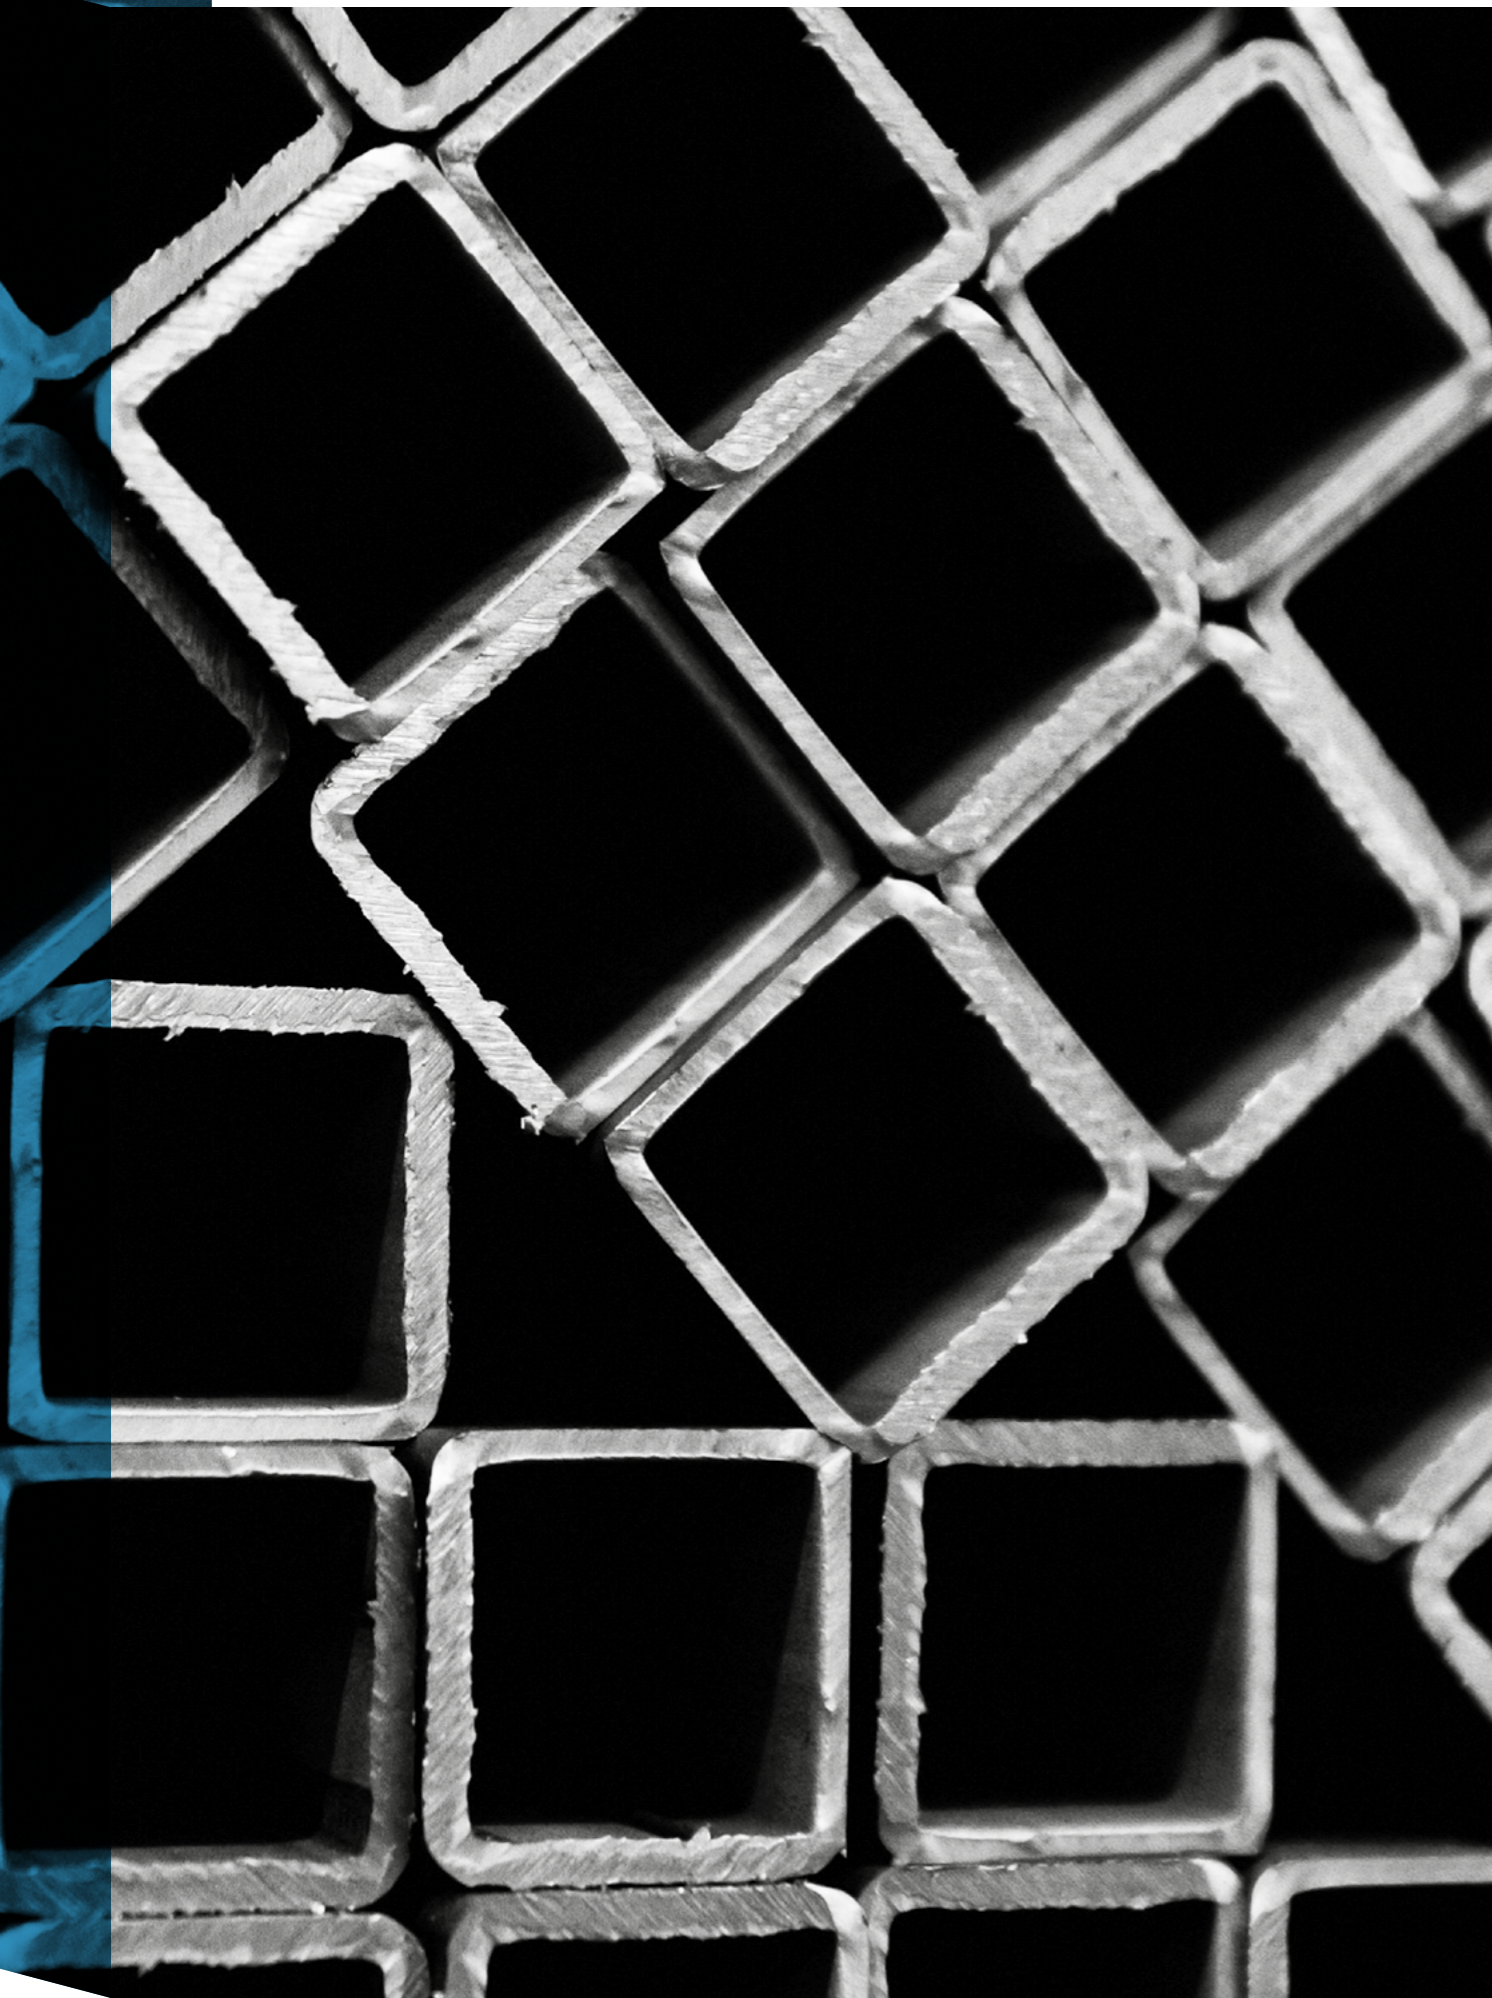

CONTACT

Benieuwd naar wat we voor jou kunnen betekenen? Onze medewerkers staan voor u klaar. Neem geheel vrijblijvend contact met ons op.



Bel 0515 580 880

Op werkdagen van 08:00 - 17:00



Stuur een Whatsapp

0515 580 880



Stuur een E-mail

info@nedinox.nl



Nedinox B.V.

De Marne 16-18 | 8701 PT | Bolsward





Nedinox B.V. | De marne 16 - 18 | 8701 PT Bolsward
+31 515 580 880 | info@nedinox.nl | nedinox.nl